

# ECS306

## Identification

Example: ECS 306-3  
 E: Boron Free E – Glass  
 306 : CPIC sizing reference  
 CS: Chopped Strands  
 3: Chopped length (mm)



## Product Description

Standard product for MPPO (PPE). Applied in automobile and electric products. FDA approval and NPE free.

## Product Benefits

- Unique surface treatment technology
- Good dispersion
- Good integrity
- Good operability of the process
- Good resin bond

## Technical Characteristics

| Sizing type | Filament Diameter (μm) | Moisture content (%) | Loss on ignition (%) | Integrity (g) |
|-------------|------------------------|----------------------|----------------------|---------------|
| --          | ISO1888                | ISO3344              | ISO1887              | *CPIC/TM-13   |
| Silane      | 13 ± 1                 | ≤ 0.05               | 0.6 ± 0.1            | ≤ 5           |

| Product Code | Type of Glass | Filament Diameter (μm) | Chopped Length (mm) |
|--------------|---------------|------------------------|---------------------|
| ECS306       | E             | 13                     | 3                   |


## Packaging

Available in two packaging:

1. The bottom of the ease of unloading tons of polypropylene super sack bag
2. More flexible coated paper bags

## Pallets characteristics

| Package           | Weight (kg) | Bag number per pallet | Pallet size (mm) |
|-------------------|-------------|-----------------------|------------------|
| Super sack bag    | 1000        | 1                     | 1140*1140*1100   |
| Coated paper bags | 25          | 40                    | 850*500*120      |

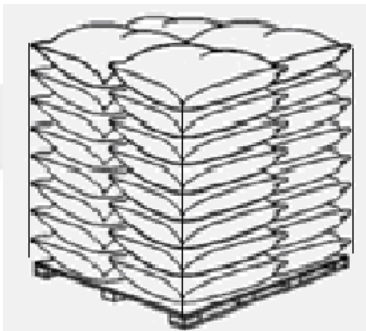

Note: Please contact us if you have special requirements.

## Storage

If no special requirements, it should be stored in cool and dry place. It is recommended that the temperature control in the 10-30°C, moisture control in 50-75%.

- This product before use should always be placed under the sealed packaging.
- Pallet stacking height should not be more than one layer.



ISO 9001



ISO 14001



OHSAS 18001